

Vacuum packer table top VP-430




- Totally manufactured in AISI 304 stainless steel .
- Transparent lid.
- Double sealing.
- Progressive atmosphere (Soft Air).
- Digital control panel.
- Pneumatic sealing.
- Easy disassembly of sealing bars.
- Equipped with polyethylene for faster packaging and easier bag placement.
- Easy maintenance.
- 10 m³/h BUSCH pump.
- Voltage : 230 V/ 1ph/ 50 Hz.

Options

- Gas flushing entrance.
- Controlled by sensor.
- Cut of the bag.

Accessories


- Inclined plate for packaging products with liquids or sauces.
- Vacuum connector in external buckets.

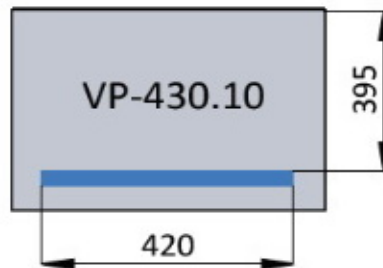

Technical information


	VP-430.10
Pump capacity	10m ³ /h
Pump Power HP/Kw	0.5/.0.37
Chamber dimensions (mm)	430x450x180
Packaging dimensions (mm)	770x730x700
Net/Gross weight (Kg)	60/68

Dimensions in mm

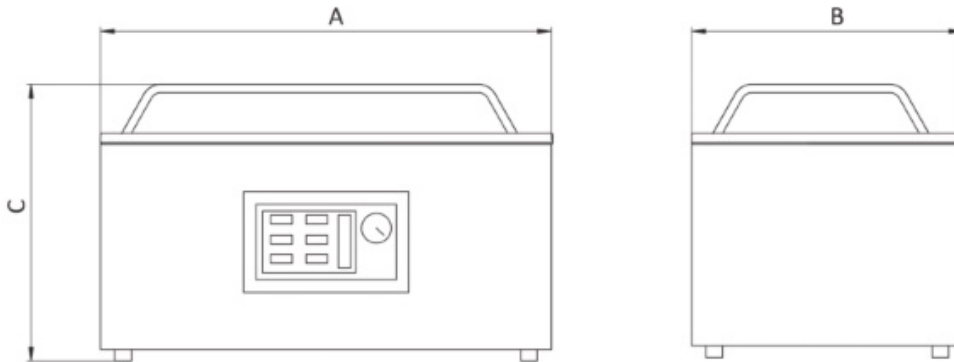


	A	B	C
VP-430.10	490	580	470

Type of sealing




DOUBLE
SEALING



SIMPLE
SEALING + CUT

Control panels

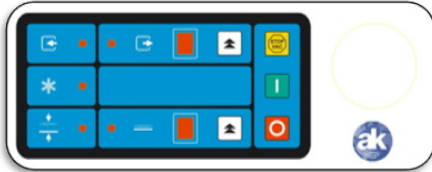


Control Panel by time and without gas

- Digital control panel.
- Vacuum control by time.
- sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- Step-by-Step monitoring of the cycle through LEDs.
- Vacuum gauge.



Control Panel by time and with gas

- Digital control panel.
- Vacuum control by time.
- Gas flushing entrance control by time.
- sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- Step-by-Step monitoring of the cycle through LEDs.
- Vacuum gauge.

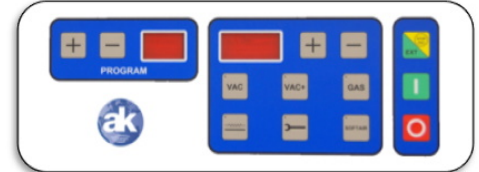

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- VAC+ button, additional vacuum time.
- Maintenance button control
- 99 memory positions.
- Step-by-Step monitoring of the cycle through LEDs.