


Simply Smart.

P2500 Series
Monochrome Laser Printer





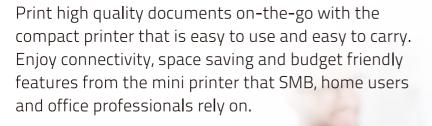

• 1600 pages starter cartridge • Silvery-grey sleek exterior



One step driver installation and direct printing



Office document direct print from mobile devices

PANTUM



Compact and Sleek Design



Fast Print Speed



Wi-Fi Connectivity and Mobile Printing



Wifi and print from mobile device available for P2509W



KEY SPECIFICATIONS



IODEL	■P2509		■P2509W
NTING			
echnology	Electrophotographic monochrome laser		
Print speed	22 ppm (A4) / 23 ppm (Letter)		
First print out time	Less than 7.8s		
Maximum Monthly Duty Cycle	15,000 pages		
Recommended monthly volume	700 pages		
Resolution(dpi)	Max. 1,200×1,200		
Printer language	GDI		
Duplex Mode	Manual		
PER HANDLING			
Paper input	150 pages		
Paper output	100 pages		
Paper output	Plain, Thick, Transparency, Cardstock, Label, Envelope, Thin		
Media size	A4, A5, A6, JIS B5, ISO B5, B6, Letter, Legal, Executive, Statement, Monarch envelope, DL envelope, C5 envelope, C6 envelope, NO.10 envelope, Japanese postcard, Folio, Oficio, Big 16k, 32k, 16k, Big 32k, ZL, Yougata4, Postcard, Younaga3, Nagagata3, Yougata2		
Media weight	60~163g/m²		
NERAL			
Dimensions (WxDxH)	337 x 220 x 178 mm (13.27" x 8.66" x 7.01")		
Weight (with cartridge)	4.75kg (10.47lbs)		
Recommended environment	Temperature range: 10-32°C (50°F-90°F) Humidity range: 20% - 80%		
Power	110V Model: AC100~127V (±10%); 50Hz/60Hz; 6A 220V Model: AC220~240V (-15%,+10%), 50Hz/60Hz; 3A		
Noise	Printing: 52 dB Standby: 30 dB		
Power consumption	Printing: Average 370W Ready: 38W Sleep Mode: Less than 2W		
Operating system compatibility	Windows Server2003 / 2008 / 2012 / XP / Vista / Win 7 / Win 8 / Win8.1 / Win10 (32/64 Bit); Mac OS 10.7~10.13; Linux: Ubuntu12.04/14.04 (32/64 Bit)		
Mobile Operating system compatibility		 	iOS 7.0 and above; Android 4.4 and above
Connectivity	Hi-Speed USB 2.0; WiFi: IEEE 802.11b/	g/n ¦	Hi-Speed USB 2.0
Processor speed	600MHz		
Memory	128MB		
NSUMABLE			
Toner cartridge ⁽¹⁾	PD-219 (Standard capacity toner: 1,600 pages)		

WHAT'S IN THE BOX

Printer x 1/ 1600 pages starter cartridge x 1 / USB interface cable x 1 / Power cord x 1 / CD-ROM x 1 / Quick setup guide x 1

(1) As per ISO/IEC 19752 specification (Individual users will experience different results based on their environment and page coverage)

Copyright © 2019 Pantum International Limited. The information contained herein is subject to change without notice. Pantum shall not be liable for technical or editorial errors or omissions contained herein.
*Printer data based on Pantum internal testing.